

MARION COUNTY SURVEYOR'S OFFICE


SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 10 TWN. 14_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 1-22-10
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: Harrison
Method of Establishment: County: 2-25-2002
IN S.P.C. E Zone, NAD 83 (1986)
Name: 14021001
N: 491 798.294 0(m)
E: 45 007.462 0(m)

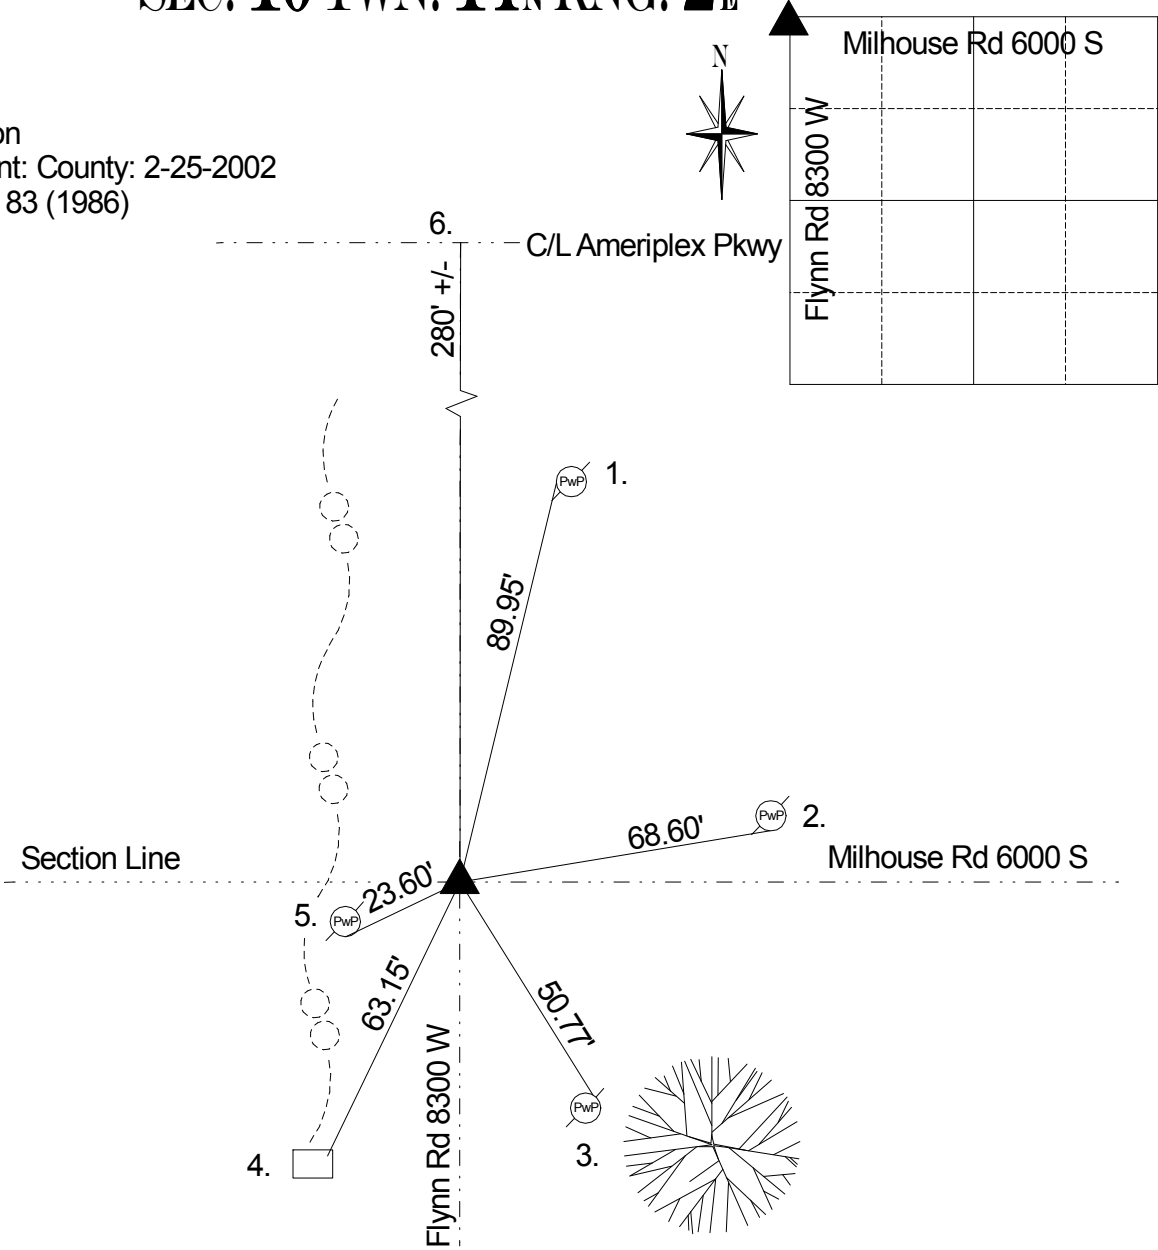

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 8" white oak bearing N 36 E 16 links and a 6" ironwood bearing S 5 W 5 links (Marion County Atlas p. 1). A survey by H. Klausmann on April 13, 1908 indicates a set stone (Decatur Legal Book p. 42). Bruer called corner a rebar on 10/6/1978. Wilcoxen called a PK nail on 7/5/85. Corner excavated by Gries on 9/20/88 and a rebar was found 20" down. A #205 cast iron Harrison monument was set in position as the corner. Kiste called a Harrison monument on 5/26/90 . Wilcoxen called same on 12/22/1994. Wilcoxen called same on 7/23/98. Whiteside called same on 2/25/2002. Corner excavated on 6/17/05 by Kiste and a #205 cast iron Harrison monument was reset as previous Harrison was removed for construction. Kiste called Harrison on 6/20/05. Wilcoxen called same on 1/22/10.

REF.	DISTANCE	DESCRIPTION
1.	89.95'	Mag nail w/washer W PwP #39-711 Y 12" up
2.	68.60'	Mag nail w/washer S PwP #32-711 Y 12" up
3.	50.77'	Mag nail w/washer NE PwP #34-711 Y 2" up
4.	63.15'	Cut 'x' NE corner of concrete box culvert
5.	23.60'	Mag nail w/washer S PwP #151-711 Y 36" up
6.	280' +/-	Due N to approx. C/L of Ameriplex Pkwy